

- Three 16-bit ISA expansion slot and four 32-bit PCI Bus master slots.
- Up to 132MB/sec PCI burst transfer rate.
- Dallas DS12887A/DS12887 real time clock/calendar.
- Onboard CMD PCI640B or VIA VT83C561 PCI IDE Controller supports four IDE drives and fastest I/O performance.
- Onboard NS 87311/312/332 I/O chipset supports two serial ports, one parallel port and FDC.

→ **NOTE : When plugging your CPU into the ZIF socket, make sure that pin 1 matches the CPU socket.**

Mainboard Layout

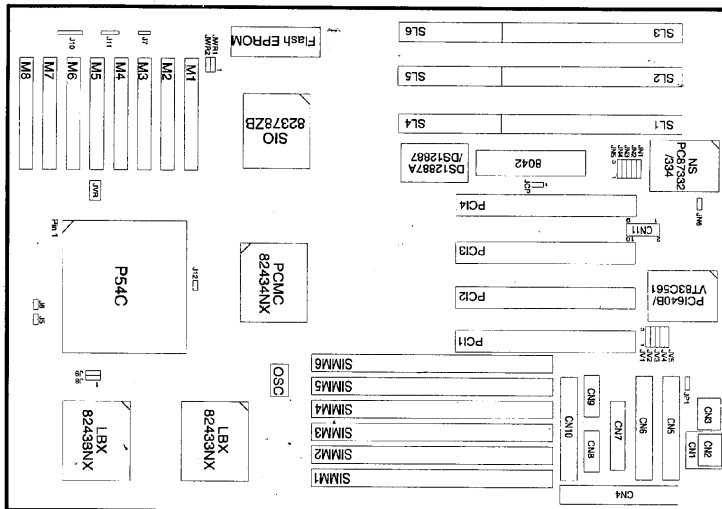


Figure 1-1. Mainboard Layout